


Vitogas 050, ECD-S boiler series  
Atmospheric gas-fired hot water heating boiler  
Rated input: 65 to 200 MBH

**VIESSMANN**

# VITOGAS 050

*Gas-fired hot water heating boiler  
in an economical and compact design*

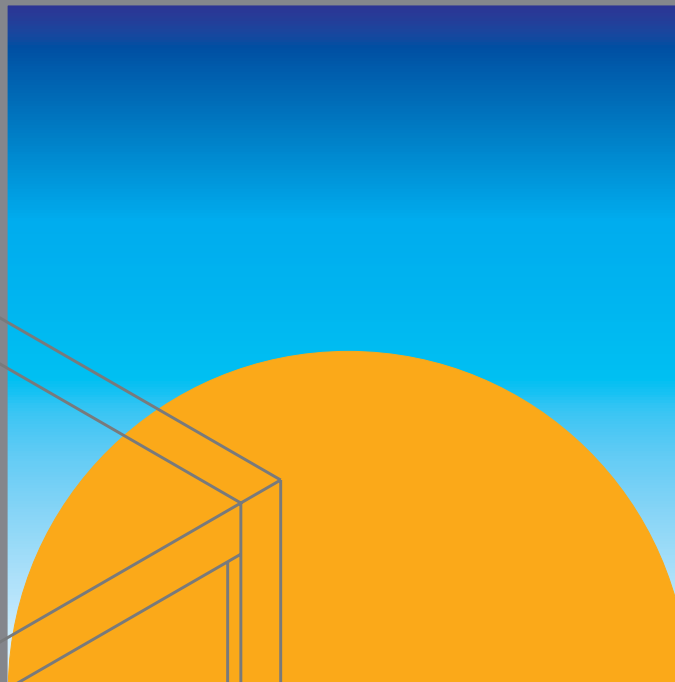

# VITOGAS 050

The Vitogas 050, ECD-S Series boiler combines compact and versatile design, reliable performance and proven Viessmann quality in an economical package.




Viessmann Manufacturing Company Inc.  
750 McMurray Road  
Waterloo, ON • N2V 2G5 • Canada  
Tel.: (519) 885-6300 Fax: (519) 885-0887  
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.  
45 Access Road  
Warwick, RI • 02886 • U.S.A.  
Tel.: (401) 732-0687 Fax: (401) 732-0590  
www.viessmann-us.com



The benefits at a glance:

- Viessmann heating technology at an **attractive price.**
- **Get the most out of your fuel dollar!** A.F.U.E. of up to 83.7%.
- **Extremely durable** gray cast iron heat exchanger for **maximum operational reliability and service life.**
- **Efficient combustion and quiet operation** with large diameter, stainless steel burners.
- Integrated draft hood and vent damper for **vertical chimney venting.**
- Integrated pump aquastat protects against corrosive flue gas condensation, **extending service life of boiler.**
- **Compact, lightweight design** and minimal clearances allow **installation in difficult-to-access boiler rooms, even alcoves or closets.**
- Thick insulation **reduces standby heat losses.**
- Spacious, wet-base water walls prevent deposits, reduce stress and **increase boiler life.**
- Boiler can be mounted on top of a horizontal Vitocell hot water storage tank for **increased versatility and space-efficiency.**
- **More overall comfort, savings and reliability** with added Viessmann Vitocell indirect-fired DHW tank.



Durable gray cast iron heat exchanger



Vitogas 050, ECD-S: economical, compact and reliable

<b>VITOGAS 050</b>	ECDS-	065	080	100	115	140	155	180	200
Rated input	MBH	65	80	100	115	140	155	180	200
Rated output	MBH	54	66	83	95	116	129	149	166
Depth	inches	19%	19%	19%	19%	19%	19%	19%	19%
Width	inches	13½	13½	17	17	21	21	25	25
Height	inches	43	43	43	43	43	43	46	46
Weight	lbs	257	257	330	330	387	387	460	460

Weight includes insulation, burners and packaging.



Wet-base sectional design for longer service life

Technical information subject to change without notice.